DATA: ALASKA-2


Art: ALASKA-2
Street light fixture with 20 LED MC - 115W





General Features

Luminous source:	20 LED MC - 4000K
Color rendering index:	> 75
Lumen output:	14.143 lm @ Ta 35°
Average life:	L90B10 @ Ta 25° > 100.000h
Dimension:	798 x 380 x 163mm
Packing:	Single in carton box
Weight:	10,5 Kg

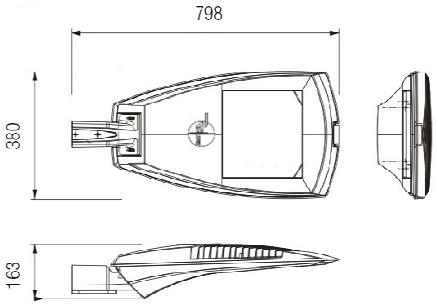

Wiring Features

Insulation class:	Class 2
Effective power:	115W
Drive current:	420mA
Voltage:	220-240V 50-60Hz
Power Factor:	cos fi 0.95
Surge protection:	Up to 10 Kv
Heat Protection:	NTC resistor
Driver:	Electronic Dimmable driver dali
Quality marks:	CE ENEC
Standards:	CEI EN 60598-1; CEI EN 60598-2-03;

Constructive Features

F mark:	Suitable to be installed on normally flammable surfaces
CE mark: Protection	Manufacturer's declaration
degree: Mechanical	IP66
resistance: Body:	> IK 08
Painting:	Painted die-cast aluminum
Optic group:	epoxy-polyester powder - grey (RAL 7016) Multi chip LED mounted on metal core PCB board in aluminum, with secondary lenses in PMMA for streetlight batwing distribution.
Diffuser:	In transparent flat tempered glass 4 mm thick
Screws:	In stainless steel
Heat sink:	Made of high thermal conductivity aluminum
Gasket:	In silicone for IP 66
Mounting system:	Top pole or side mounting, Ø60 mm poles
Fixing system:	With adjustable pole attack